


STRIP LED 5050 IP44

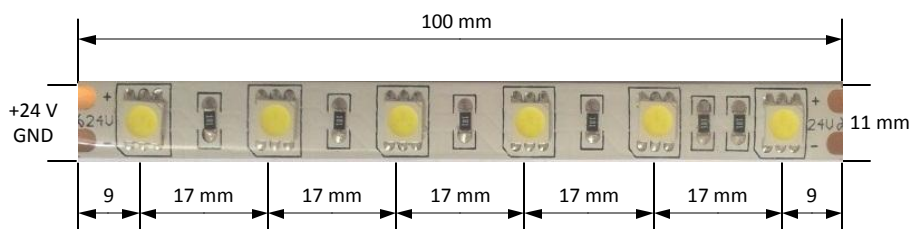

- Led Strip based on a flexible printed circuit with Top SMD LED 5050 (3 chips)
- Entire strip consist of 300 LEDs 5mt conveniently field cut with regular scissors (Cuttable every 6 LEDs)
- 24 Volt conveniently field with regular scissors (Cuttable every 6 LEDs 100mm)
- Linear LED strip on flexible printed circuit board Kapton™, long life and stable optical performance
- Flexible three-dimensional assembly possible
- Available in various colors: Cool White, Natural White, Warm White and RGB
- Waterproof style: IP44
- Long life 2 years warranty

Ordering Specification and Information

Item Number	Color	Lenght(mt)	Number of LEDs	LED Type	Watts max	Volt	Current (Amps)	Lum. Intensity (mcd)	Lumen/mt	Viewing Angle
U50CW602450E	Cool White	5	300	Top SMD LED 5050 (3 chips)	48	24DC	2	300 x 3500	950	120°
U50W40602450E	Natural White	5	300		48	24DC	2	300 x 3200	850	120°
U50WW602450E	Warm White	5	300		48	24DC	2	300 x 3000	750	120°
U50RGB602450E	RGB	5	300		48	24DC	2	300 x 3000	750	120°

Electrical & Optical Data

Dimensioni	Dimensions	100 mm x 11 mm x 3,5 mm
Lunghezza	Step lenght	100 mm/6 LED per step
Numero LED	Number LED	60 Led/mt
Voltaggio	Voltage (V)	24 Volt DC
Corrente	Current	40mA per step
Temperatura	Temperature	Tcmin=-25° Tcmax=+60°
Colore L/mt	Color L/mt	Cool White 950 Lumen/mt 6200 6500K*
		Natural White 850 Lumen/mt 4300 4500K*
		Warm White 750 Lumen/mt 2600 2700K*